

# Celsite<sup>®</sup>, Surecan<sup>®</sup>, Cytocan<sup>®</sup>

Access Port Systems, PICCs, Accessories  
and Non-Coring Port Needles




Vascular Systems

# Celsite<sup>®</sup>, Surecan<sup>®</sup>, Cytocan<sup>®</sup> Access Port Systems, PICCs, Accessories and Non-Coring Port Needles

| Product group  |   |  | Page |
|--|---|--|------|
| Access Port Systems  | <b>Implantation Sites</b>                               |  | 3    |
| Access Port Systems for venous access  | <b>Celsite<sup>®</sup> Epoxy</b>                        | Premium venous access ports with special compact port design                               | 4    |
|  | <b>Celsite<sup>®</sup> ECG</b>                          | Venous access ports for accurate ECG guided catheter positioning                           | 6    |
|  | <b>Celsite<sup>®</sup> Discreet</b>                     | Venous access ports with unique design for better cosmetic results                         | 8    |
|  | <b>Celsite<sup>®</sup> PSU</b>                          | Access ports for mid to long-term venous applications                                      | 10   |
|  | <b>Celsite<sup>®</sup> Concept</b>                      | Venous access ports with specialized silicone suture areas                                 | 12   |
|  | <b>Celsite<sup>®</sup> Implantofix<sup>®</sup></b>      | Standard venous access ports with catheter/port screw connection                           | 13   |
|  | <b>Celsite<sup>®</sup> Double</b>                       | Specialized venous access ports with two separated port chambers                           | 14   |
| Access Port Systems for arterial access  | <b>Celsite<sup>®</sup> Valved</b>                       | Venous access ports with valved catheter tip   | 15   |
|  | <b>Celsite<sup>®</sup> Arterial</b>                     | For hepatic artery infusion therapy (surgical implantation technique)                      | 16   |
| Access Port Systems for peritoneal access                                      | <b>Celsite<sup>®</sup> Anthron<sup>®</sup> Arterial</b> | For loco-regional chemotherapy of liver tumours via a heparin covered catheter             | 17   |
|  | <b>Celsite<sup>®</sup> Peritoneal</b>                   | For loco-regional chemotherapy of peritoneal metastases and ovarian cancer                 | 18   |
| Access Port Systems for pleural access   | <b>Celsite<sup>®</sup> DRAINAPORT</b>                   | For intra-peritoneal administration of chemotherapy or drainage of malignant ascites       | 19   |
| Access Port Systems for spinal or epidural access                              | <b>Celsite<sup>®</sup> Spinal</b>                       | For spinal administration of pain relieving drugs  | 20   |
|  | <b>Characteristics, MRI, CECT</b>                       |  | 21   |
| Safety Access Port Needles   | <b>Surecan<sup>®</sup> Safety II</b>                    | High pressure resistant non-coring safety needle for access ports                          | 22   |
| Access Port Needles  | <b>Winged Surecan<sup>®</sup></b>                       | Non-coring needle with flexible wings for long term infusions                              | 24   |
|  | <b>Cytocan<sup>®</sup></b>                              | Non-coring needle for long term infusions with fixation base                               | 25   |
|  | <b>Angled Surecan<sup>®</sup></b>                       | Non-coring port needle for short term infusions  | 25   |
|  | <b>Straight Surecan<sup>®</sup></b>                     | Non-coring needle for bolus injections or flushing of access ports                         | 25   |
| Peripherally Inserted Central Catheters (PICC)                                 | <b>Celsite<sup>®</sup> PICC-Cel</b>                     | Peripherally Inserted Central venous Catheter for short to long-term drug infusion therapy | 26   |
| <b>Recommended maximum flow rates Celsite<sup>®</sup> Access Ports Systems</b> |   |  | 28   |
| <b>Overview and type declaration Celiste<sup>®</sup> Access Port Systems</b>   |   |  | 29   |
| <b>Accessories</b>   |   |  | 30   |

# Access Port Systems

## Implantation Sites

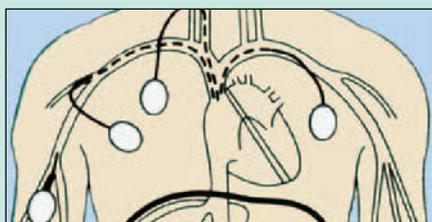

**Venous access** for repeated intra-venous administration of, for example, chemotherapy, antibiotics and anti-viral drugs, total parenteral nutrition (TPN), blood sampling or transfusion




**Arterial access** for intra-arterial administration of chemotherapy



**Epidural or intra-thecal access** for spinal administration of pain relieving drugs



**Peritoneal access** for loco-regional chemotherapy and (i. e. with Drainaport®) for hydration and drainage of malignant ascites

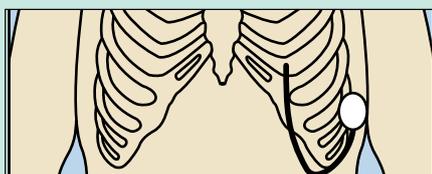

**Pleural access** for drainage of malignant pleural effusion (MPE)

# Access Ports for venous access

## Celsite® Epoxy

Premium venous access ports with special compact port design

As the premium access port range of B. Braun, Celsite® Epoxy offers outstanding features as well as an extended portfolio of different port sizes and catheters.


They are intended to be used for repeated, intravenous administration of, for example, chemotherapy, antibiotic and anti-viral drugs, parenteral nutrition, blood sampling or transfusion.

Silicone septum for reliable sealing of the puncture

Complete range of silicone and polyurethane catheters with an atraumatic tip and graduated from 5 cm

Reliable radiopaque connection ring with anti-kink protection

2 suture holes to facilitate fixation of the port

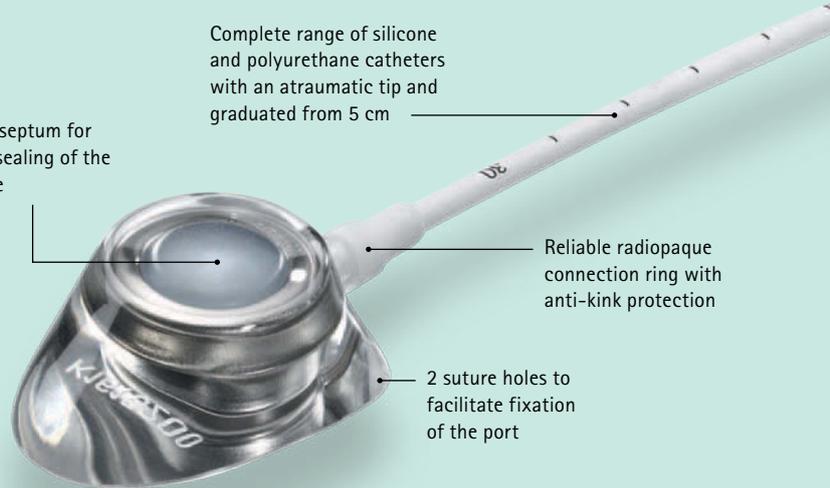


### Highly compact design

Celsite® Epoxy ports have an extremely low profile and related to the total dimensions of the port a particularly large septum.



### High pressure resistant

The complete range of venous Celsite® Epoxy ports is high pressure resistant up to 325 psi. This enables for power injections of contrast media in radiology, without the need for additional access and needlesticks.



### Radiopaque CT Marking

Celsite® Epoxy offers radiopaque CT marking. With CT marking it is possible to identify the port as high pressure resistant in the x-ray image.



### Extended Portfolio

Available as extra small Brachial- and Babyport®. One of the most compact access ports commercially available.






| Catheter             | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |    | 325 PSI Recommended maximum flow rates (mL/s) Contrast media at 37°C (325 psi = 22.4 bar)** |     |     |                           |     |     | Implantation technique | Type        | Reference | Accessories see page 30 |
|----------------------|-----------|---------|-------------|---------------------|----|---|-----|-----|---------------------------|-----|-----|------------------------|-------------|-----------|-------------------------|
|                      |           |         |             |                     |    | Viscosity 5.8 mPa.s (cP)  |     |     | Viscosity 11.4 mPa.s (cP) |     |     |                        |             |           |                         |
|                      |           |         |             |                     |    | 19G   | 22G | 20G | 19G                       | 22G | 20G |                        |             |           |                         |
| <b>Standard</b>      |           |         |             |                     |    |   |     |     |                           |     |     |                        |             |           |                         |
| PUR                  | 5 /1.7    | 1.1     | 900         | 22                  | 10 | 2   | 5   | 6   | 1                         | 3   | 5   | Braunule, Seldinger    | ST201C      | 4432045   | ②                       |
| Silicone             | 6.5/2.2   | 1.0     | 800         | 24                  | 10 | 2   | 6   | 7   | 1                         | 4   | 5   | Surgical cut-down      | T201F       | 4430034   | ⑥                       |
| Silicone             | 6.5/2.2   | 1.0     | 800         | 24                  | 10 | 2   | 6   | 7   | 1                         | 4   | 5   | Seldinger              | ST201F      | 4430409   | ①                       |
| PUR                  | 6.5/2.1   | 1.4     | 800         | 28                  | 11 | 2   | 5   | 7   | 1                         | 4   | 6   | Seldinger              | ST201P      | 4430417   | ①                       |
| PUR (high flow)      | 8.5/2.8   | 1.6     | 800         | 39                  | 12 | 2   | 6   | 8   | 1                         | 4   | 7   | Seldinger              | ST201H      | 4433149   | ①                       |
| Silicone             | 8.5/2.8   | 1.1     | 800         | 24                  | 11 | 2   | 6   | 7   | 1                         | 4   | 6   | Surgical cut-down      | T201        | 4430026   | ⑥                       |
| Silicone             | 8.5/2.8   | 1.1     | 800         | 24                  | 11 | 2   | 6   | 7   | 1                         | 4   | 6   | Seldinger              | ST201       | 4430395   | ①                       |
| Silicone (high flow) | 10 /3.2   | 1.6     | 800         | 38                  | 12 | 2   | 6   | 9   | 1                         | 4   | 6   | Seldinger              | ST201G      | 4433807   | ①                       |
| <b>Small</b>         |           |         |             |                     |    |   |     |     |                           |     |     |                        |             |           |                         |
| Silicone             | 6.5/2.2   | 1.0     | 800         | 24                  | 10 | 2   | 5   | 8   | 1                         | 4   | 6   | Seldinger              | ST205       | 4430893   | ①                       |
| Silicone             | 6.5/2.2   | 1.0     | 800         | 24                  | 10 | 2   | 5   | 8   | 1                         | 4   | 6   | Surgical cut-down      | T205        | 4430085   | ⑥                       |
| PUR                  | 6.5/2.1   | 1.4     | 800         | 28                  | 11 | 2   | 5   | 8   | 1                         | 4   | 5   | Seldinger              | ST205P      | 4430894   | ①                       |
| Silicone             | 8.5/2.8   | 1.1     | 800         | 24                  | 11 | 2   | 5   | 8   | 1                         | 3   | 6   | Seldinger              | ST205L      | 4430895   | ①                       |
| PUR (high flow)      | 8.5/2.8   | 1.6     | 800         | 39                  | 12 | 2   | 6   | 9   | 1                         | 4   | 6   | Seldinger              | ST205H      | 4436806   | ①                       |
| Silicone***          | 6.5/2.2   | 1.0     | 800         | 24                  | 10 | 2   | 5   | 8   | 1                         | 4   | 6   | Seldinger              | ST215       | 4430143   | ①                       |
| <b>Baby/Brachial</b> |           |         |             |                     |    |   |     |     |                           |     |     |                        |             |           |                         |
| PUR                  | 4.5/1.5   | 0.8     | 800         | 14                  | 8  | 2   | 4   | -   | 1                         | 3   | -   | Seldinger              | Babyport®   | 4433742   | ④                       |
| PUR                  | 5 /1.7    | 1.1     | 700         | 22                  | 10 | 2   | 5   | -   | 1                         | 4   | -   | Seldinger, OTW         | Brachial    | 4433734   | ⑩                       |
| Silicone             | 6 /2.0    | 1.2     | 600         | 27                  | 12 | 2   | 5   | -   | 1                         | 4   | -   | Seldinger              | Babyport® S | 4433842   | ⑤                       |


Celsite® Epoxy offers a wide range of Silicone and PUR catheters and three different port sizes, Standard, Small and Baby/brachial.

#### Standard

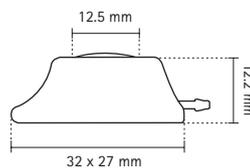


**Material:** Titanium | Epoxy  
**Weight:** 8g  
**Internal Volume:** 0.5 mL

#### Small



**Material:** Titanium | Epoxy  
**Weight:** 5g  
**Internal Volume:** 0.25 mL

#### Baby/Brachial



**Material:** Titanium | Epoxy  
**Weight:** 3g  
**Internal Volume:** 0.15 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

\*\* With a catheter of 20 cm and Surecan® Safety II. For countries under CE mark only.

\*\*\* With pre-connected catheter.

# Access Ports for venous access

## Celsite® ECG

Venous access ports for accurate ECG guided catheter positioning

- Celsite® ECG allows catheter positioning via intra-atrial ECG detection
- Accurate placement of the catheter tip into the superior vena cava without intraoperative fluoroscopy
- Available with radiopaque "CT" marking.

Correct and accurate positioning of the catheter is of high importance to reduce the risk of long term complications.\*



### Accepted

Proven in daily clinical routine and numerous clinical trials.

### Accurate

Celsite® ECG allows accurate placement of the catheter tip.

### Without x-ray

No expensive x-ray equipment needed in almost all cases.  
No x-ray exposure for theatre staff and patients.

### Compatible


Celsite® ECG can be used with almost any ECG monitor with no need for additional investment.




| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | 325 PSI Recommended maximum flow rates (mL/s) Contrast media at 37°C (325 psi = 22.4 bar)** |     |     |                           |     |     | Implantation technique | Type       | Reference | Accessories see page 30 |  |
|-----------------|-----------|---------|-------------|---------------------|-----|---|-----|-----|---------------------------|-----|-----|------------------------|------------|-----------|-------------------------|--|
|                 |           |         |             |                     |     | Viscosity 5.8 mPa.s (cP)  |     |     | Viscosity 11.4 mPa.s (cP) |     |     |                        |            |           |                         |  |
|                 |           |         |             | 19G                 | 22G | 22G   | 20G | 19G | 22G                       | 20G | 19G |                        |            |           |                         |  |
| <b>Standard</b> |           |         |             |                     |     |   |     |     |                           |     |     |                        |            |           |                         |  |
| Silicone        | 6.5 / 2.2 | 1.0     | 500         | 24                  | 10  | 2   | 6   | 7   | 1                         | 4   | 5   | Seldinger (ECG)        | ST201F ECG | 4440140   | ⑨                       |  |
| Silicone        | 6.5 / 2.2 | 1.0     | 500         | 24                  | 10  | 2   | 6   | 7   | 1                         | 4   | 5   | Surgical cutdown (ECG) | T201F ECG  | 4440150   | ⑭                       |  |
| Silicone        | 8.5 / 2.8 | 1.1     | 500         | 24                  | 11  | 2   | 6   | 7   | 1                         | 4   | 6   | Seldinger (ECG)        | ST201 ECG  | 4430140   | ⑨                       |  |
| Silicone        | 8.5 / 2.8 | 1.1     | 500         | 24                  | 11  | 2   | 6   | 7   | 1                         | 4   | 6   | Surgical cutdown (ECG) | T201 ECG   | 4430150   | ⑭                       |  |
| <b>Small</b>    |           |         |             |                     |     |   |     |     |                           |     |     |                        |            |           |                         |  |
| Silicone        | 6.5 / 2.2 | 1.0     | 500         | 24                  | 10  | 2   | 5   | 8   | 1                         | 4   | 6   | Seldinger (ECG)        | ST205F ECG | 4440111   | ⑨                       |  |
| Silicone        | 6.5 / 2.2 | 1.0     | 500         | 24                  | 10  | 2   | 5   | 8   | 1                         | 4   | 6   | Surgical cutdown (ECG) | T205F ECG  | 4440222   | ⑭                       |  |
| Silicone        | 8.5 / 2.8 | 1.1     | 500         | 24                  | 11  | 2   | 5   | 8   | 1                         | 3   | 6   | Seldinger (ECG)        | ST205 ECG  | 4430111   | ⑨                       |  |
| Silicone        | 8.5 / 2.8 | 1.1     | 500         | 24                  | 11  | 2   | 5   | 8   | 1                         | 3   | 6   | Surgical cutdown (ECG) | T205 ECG   | 4430222   | ⑭                       |  |

**Localisation**

- Maximal P-wave height is reached and maintained when the catheter enters into the right atrium.  
After identifying the area where the P-wave begins to develop its maximal amplitude (which corresponds anatomically to the junction between superior vena cava and the right atrium) advance the catheter a further 2 cm.
- This is the final position of the catheter tip with the patient in supine position.  
This catheter position allows for the 2-3 cm cranial movement of the catheter which occurs when the patient is upright.

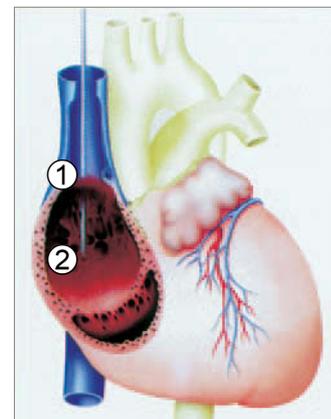


**Standard**

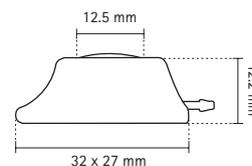

**Material:** Titanium | Epoxy  
**Weight:** 8g  
**Internal Volume:** 0.5 mL

**Small**



**Material:** Titanium | Epoxy  
**Weight:** 5g  
**Internal Volume:** 0.25 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.  
 \*\* With a catheter of 20 cm and Surecan® Safety II. For countries under CE mark only.

# Access Ports for venous access

## Celsite® Discreet

Venous access ports with unique design for enhanced port stability and better cosmetic results

Celsite® Discreet offers unique design and allows better cosmetic results for the patient.

- The low profile design with patented 90° connection provides a high level of discretion
- Also available in small size to facilitate implantation in paediatric and underweight patients
- MRI compatible, Latex, DEHP and PVC free
- Available with radiopaque "CT" marking.



### Prevention of Port Flip

Patented 90° angle of the exit cannula reduces the risk of port flip and associated blockage due to catheter kinking

### Better Cosmetic Results


The surgical incision can be made vertically and placed laterally following the subcutaneous traction lines

### High Pressure Resistant

Celsite® Discreet offers radiopaque CT marking. With CT marking it is possible to identify the port as high pressure resistant in the x-ray image.



| Catheter        | Exit can- nula | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) | 325 PSI Recommended maximum flow rates (mL/s) Contrast media at 37°C (325 psi = 22.4 bar)** |     |     |                           |     |     | Implantation technique | Type      | Reference | Accessories see page 30 |     |
|-----------------|----------------|-----------|---------|-------------|---------------------|---|-----|-----|---------------------------|-----|-----|------------------------|-----------|-----------|-------------------------|-----|
|                 |                |           |         |             |                     | Viscosity 5.8 mPa.s (cP)  |     |     | Viscosity 11.4 mPa.s (cP) |     |     |                        |           |           |                         |     |
|                 |                |           |         |             |                     | 19G   | 22G | 22G | 20G                       | 19G | 22G |                        |           |           |                         | 20G |
| <b>Standard</b> |                |           |         |             |                     |   |     |     |                           |     |     |                        |           |           |                         |     |
| Silicone        | left           | 8.5/2.8   | 1.1     | 800         | 26                  | 11  | 2   | 6   | 7                         | 1   | 4   | 6                      | Seldinger | STL201L   | 4430144                 | ⑦   |
| Silicone        | right          | 8.5/2.8   | 1.1     | 800         | 26                  | 11  | 2   | 6   | 7                         | 1   | 4   | 6                      | Seldinger | STR201L   | 4430145                 | ⑦   |
| PUR             | left           | 8.5/2.8   | 1.6     | 800         | 39                  | 12  | 2   | 6   | 8                         | 1   | 4   | 7                      | Seldinger | STL201H   | 4440201                 | ⑦   |
| PUR             | right          | 8.5/2.8   | 1.6     | 800         | 39                  | 12  | 2   | 6   | 8                         | 1   | 4   | 7                      | Seldinger | STR201H   | 4440202                 | ⑦   |
| <b>Small</b>    |                |           |         |             |                     |   |     |     |                           |     |     |                        |           |           |                         |     |
| Silicone        | left           | 6.5/2.2   | 1.1     | 800         | 22                  | 11  | 2   | 5   | 8                         | 1   | 4   | 6                      | Seldinger | STL205F   | 4430146                 | ⑦   |
| Silicone        | right          | 6.5/2.2   | 1.1     | 800         | 22                  | 11  | 2   | 5   | 8                         | 1   | 4   | 6                      | Seldinger | STR205F   | 4430147                 | ⑦   |
| PUR             | left           | 6.5/2.1   | 1.4     | 800         | 28                  | 11  | 2   | 5   | 8                         | 1   | 4   | 5                      | Seldinger | STL205P   | 4440203                 | ⑦   |
| PUR             | right          | 6.5/2.1   | 1.4     | 800         | 28                  | 11  | 2   | 5   | 8                         | 1   | 4   | 5                      | Seldinger | STR205P   | 4440204                 | ⑦   |

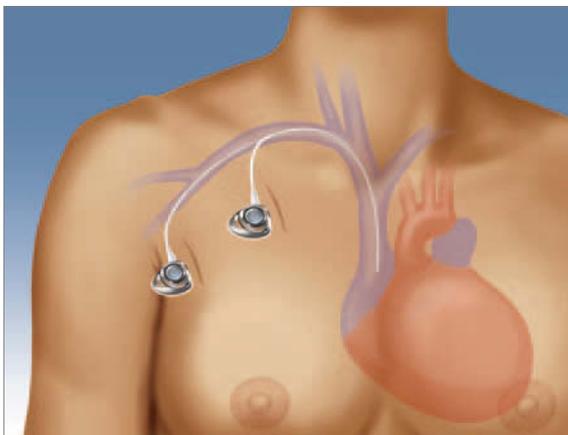


Standard and lateral placement of Celsite® Discreet with vertical incision.




CT-Marking of Celsite® Discreet

**Standard**



**Material:** Titanium | Epoxy  
**Weight:** 7g  
**Internal Volume:** 0.5 mL

**Small**



**Material:** Titanium | Epoxy  
**Weight:** 4g  
**Internal Volume:** 0.25 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

\*\* With a catheter of 20 cm and Surecan® Safety II. For countries under CE mark only.

# Access Ports for venous access


## Celsite® PSU

Access ports for mid to long-term venous applications

Celsite® PSU is the standard venous Access Port range for any condition that requires mid to long-term intermittent or continuous central venous infusions.

This might include chemotherapy, antibiotic and anti-viral drugs, parenteral nutrition, blood sampling or transfusion.

Celsite® PSU has a polysulphone body with a titanium chamber and is high pressure resistant up to 325 psi (22,4 bar).

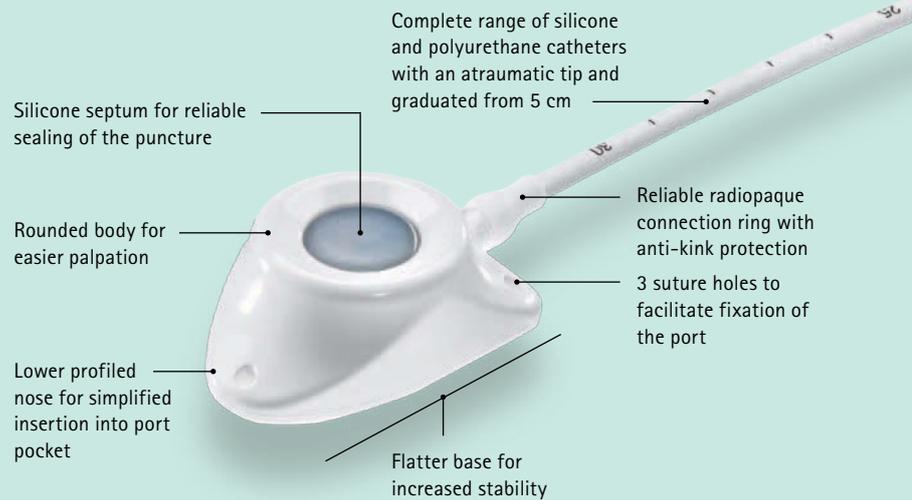


- Anatomic design and lower profiled nose for simplified insertion and patient comfort
- Also available in small size to facilitate implantation in paediatric and underweight patients
- 3 suture holes to facilitate fixation of the port
- Large range of silicone and polyurethane catheters
- The radiopaque catheter is graduated from 5 cm in order to facilitate an easy, precise and safe implantation
- MRI compatible, Latex, DEHP and PVC free
- High pressure resistance up to 325 PSI ( 22,4 bar)



| Catheter             | OD<br>(F / mm) | ID<br>(mm) | Length<br>(mm) | Flow rate*<br>(ml/min) |    | 325 PSI Recommended maximum flow rates (mL/s)<br>Contrast media at 37°C (325 psi = 22.4 bar)** |     |     |                           |     |     | Implantation<br>technique | Type     | Reference | Accessories<br>see<br>page<br>30 |     |
|----------------------|----------------|------------|----------------|------------------------|----|--|-----|-----|---------------------------|-----|-----|---------------------------|----------|-----------|----------------------------------|-----|
|                      |                |            |                |                        |    | Viscosity 5.8 mPa.s (cP)   |     |     | Viscosity 11.4 mPa.s (cP) |     |     |                           |          |           |                                  |     |
|                      |                |            |                |                        |    | 19G  | 22G | 22G | 20G                       | 19G | 22G |                           |          |           |                                  | 20G |
| <b>Standard</b>      |                |            |                |                        |    |  |     |     |                           |     |     |                           |          |           |                                  |     |
| PUR                  | 5 /1.7         | 1.1        | 900            | 22                     | 10 | 2  | 5   | 6   | 1                         | 3   | 5   | Braunule, Seldinger       | ST301C   | 4432096   | ②                                |     |
| PUR                  | 5 /1.7         | 1.1        | 370            | 22                     | 10 | 2  | 5   | 6   | 1                         | 3   | 5   | OTW                       | ST301OTW | 4433726   | ③                                |     |
| PUR                  | 6.5 /2.1       | 1.4        | 800            | 28                     | 11 | 2  | 5   | 7   | 1                         | 4   | 6   | Seldinger                 | ST301P   | 4430441   | ①                                |     |
| PUR                  | 6.5 /2.1       | 1.4        | 800            | 28                     | 11 | 2  | 5   | 7   | 1                         | 4   | 6   | Surgical cut-down         | T301P    | 4430387   | ⑥                                |     |
| Silicone             | 6.5 /2.2       | 1.0        | 800            | 24                     | 10 | 2  | 6   | 7   | 1                         | 4   | 5   | Seldinger                 | ST301F   | 4430433   | ①                                |     |
| Silicone***          | 6.5 /2.2       | 1.0        | 800            | 24                     | 10 | 2  | 6   | 7   | 1                         | 4   | 5   | Seldinger                 | ST311F   | 4436717   | ①                                |     |
| Silicone             | 6.5 /2.2       | 1.0        | 800            | 24                     | 10 | 2  | 6   | 7   | 1                         | 4   | 5   | Surgical cut-down         | T301F    | 4430000   | ⑥                                |     |
| Silicone             | 8.5 /2.8       | 1.1        | 800            | 24                     | 11 | 2  | 6   | 7   | 1                         | 4   | 6   | Seldinger                 | ST301    | 4430425   | ①                                |     |
| Silicone***          | 8.5 /2.8       | 1.1        | 800            | 24                     | 11 | 3  | +   | 7   | 2                         | 4   | 6   | Seldinger                 | ST311    | 4436709   | ①                                |     |
| Silicone             | 8.5 /2.8       | 1.1        | 800            | 24                     | 11 | 2  | 6   | 7   | 1                         | 4   | 6   | Surgical cut-down         | T301     | 4430018   | ⑥                                |     |
| PUR (high flow)      | 8.5 /2.8       | 1.6        | 800            | 39                     | 12 | 2  | 6   | 8   | 1                         | 4   | 7   | Seldinger                 | ST301H   | 4432460   | ①                                |     |
| PUR (high flow)      | 8.5 /2.8       | 1.6        | 800            | 39                     | 12 | 2  | 6   | 8   | 1                         | 4   | 7   | Surgical cut-down         | T301H    | 4432452   | ⑥                                |     |
| PUR (high flow)***   | 8.5 /2.8       | 1.6        | 800            | 39                     | 10 | 2  | 6   | 8   | 1                         | 4   | 7   | Seldinger                 | ST311H   | 4436814   | ①                                |     |
| Silicone (high flow) | 10 /3.2        | 1.6        | 800            | 38                     | 12 | 2  | 6   | 9   | 1                         | 4   | 6   | Seldinger                 | ST301G   | 4433823   | ①                                |     |
| <b>Small</b>         |                |            |                |                        |    |  |     |     |                           |     |     |                           |          |           |                                  |     |
| PUR                  | 5 /1.7         | 1.1        | 900            | 19                     | 10 | 2  | 5   | 7   | 1                         | 3   | 5   | Braunule, Seldinger       | ST305C   | 4436962   | ②                                |     |
| PUR                  | 6.5 /2.1       | 1.4        | 800            | 28                     | 11 | 2  | 5   | 8   | 1                         | 4   | 5   | Seldinger                 | ST305P   | 4436946   | ①                                |     |
| Silicone             | 6.5 /2.2       | 1.0        | 800            | 24                     | 10 | 2  | 5   | 8   | 1                         | 4   | 6   | Seldinger                 | ST305    | 4433750   | ①                                |     |
| Silicone***          | 6.5 /2.2       | 1.0        | 800            | 24                     | 10 | 2  | 5   | 8   | 1                         | 4   | 6   | Seldinger                 | ST315    | 4436725   | ①                                |     |
| Silicone             | 6.5 /2.2       | 1.0        | 800            | 24                     | 10 | 2  | 5   | 8   | 1                         | 4   | 6   | Surgical cut-down         | T305     | 4436903   | ⑥                                |     |
| Silicone             | 8.5 /2.8       | 1.1        | 800            | 24                     | 11 | 2  | 5   | 8   | 1                         | 3   | 6   | Seldinger                 | ST305L   | 4436920   | ①                                |     |
| PUR (high flow)      | 8.5 /2.8       | 1.6        | 800            | 39                     | 12 | 2  | 6   | 9   | 1                         | 4   | 6   | Seldinger                 | ST305H   | 4433556   | ①                                |     |


Celsite® PSU offers a wide range of Silicone and PUR catheters combined with two different port sizes, Standard and Small.

Standard

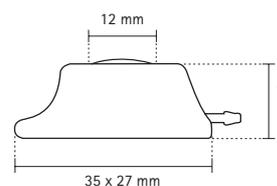

**Material:** Titanium | Polysulphone  
**Weight:** 9g  
**Internal Volume:** 0.5 mL

Small

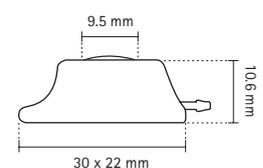

**Material:** Titanium | Polysulphone  
**Weight:** 4.7g  
**Internal Volume:** 0.25 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

\*\* With a catheter of 20 cm and Surecan® Safety II. For countries under CE mark only.

\*\*\* With pre-connected catheters.


# Access Ports for venous access

## Celsite® Concept

Venous access ports with specialized silicone suture areas

Power  
Injections



325 psi

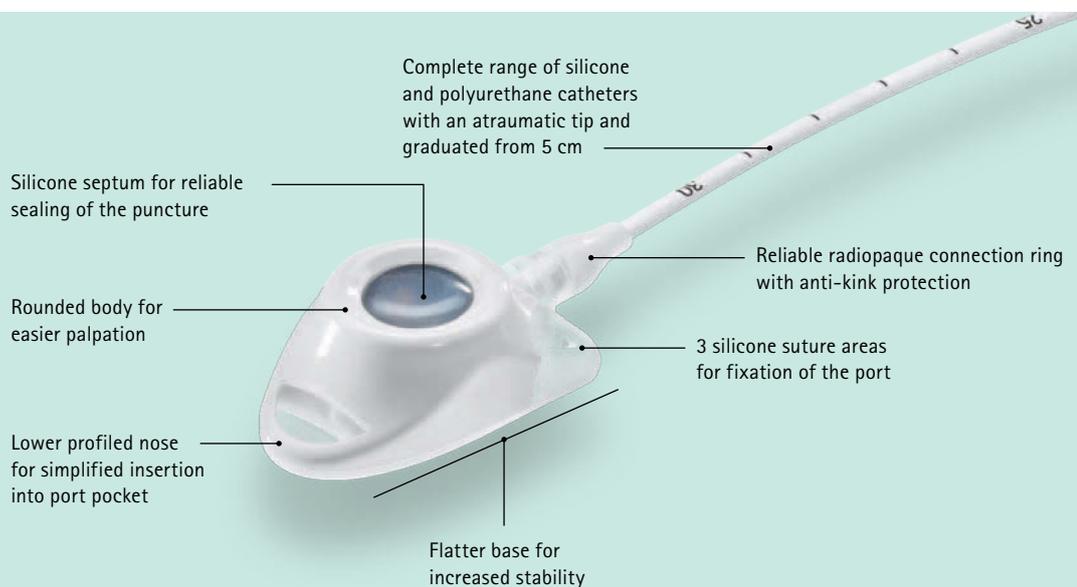

| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |    | 325 PSI Recommended maximum flow rates (mL/s) Contrast media at 37°C (325 psi = 22.4 bar)** |     |     |                           |     |     | Implantation technique | Type   | Reference | Accessories see page 30 |     |
|-----------------|-----------|---------|-------------|---------------------|----|---|-----|-----|---------------------------|-----|-----|------------------------|--------|-----------|-------------------------|-----|
|                 |           |         |             |                     |    | Viscosity 5.8 mPa.s (cP)  |     |     | Viscosity 11.4 mPa.s (cP) |     |     |                        |        |           |                         |     |
|                 |           |         |             |                     |    | 19G   | 22G | 22G | 20G                       | 19G | 22G |                        |        |           |                         | 20G |
| <b>Standard</b> |           |         |             |                     |    |   |     |     |                           |     |     |                        |        |           |                         |     |
| Silicone        | 6.5/2.2   | 1.0     | 800         | 24                  | 11 | 2   | 6   | 7   | 1                         | 4   | 5   | Seldinger              | ST501F | 4437024   | ①                       |     |
| Silicone        | 6.5/2.2   | 1.0     | 800         | 24                  | 11 | 2   | 6   | 7   | 1                         | 4   | 5   | Surgical cut-down      | T501F  | 4437021   | ⑥                       |     |
| Silicone        | 8.5/2.8   | 1.1     | 800         | 24                  | 11 | 2   | 6   | 7   | 1                         | 4   | 6   | Seldinger              | ST501  | 4437022   | ①                       |     |
| Silicone        | 8.5/2.8   | 1.1     | 800         | 24                  | 11 | 2   | 6   | 7   | 1                         | 4   | 6   | Surgical cut-down      | T501   | 4437020   | ⑥                       |     |
| <b>Small</b>    |           |         |             |                     |    |   |     |     |                           |     |     |                        |        |           |                         |     |
| Silicone        | 6.5/2.2   | 1.0     | 800         | 24                  | 11 | 2   | 5   | 8   | 1                         | 4   | 6   | Seldinger              | ST505  | 4437027   | ①                       |     |
| Silicone        | 8.5/2.8   | 1.1     | 800         | 24                  | 11 | 2   | 5   | 8   | 1                         | 3   | 6   | Seldinger              | ST505L | 4437029   | ①                       |     |
| PUR (high flow) | 8.5/2.8   | 1.6     | 800         | 39                  | 12 | 2   | 6   | 9   | 1                         | 4   | 6   | Seldinger              | ST505H | 4437028   | ①                       |     |

### Standard

### Small

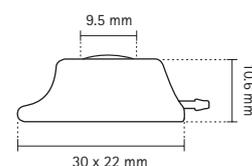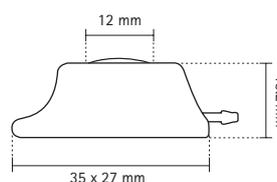

**Material:** Titanium | Polysulphone | Silicone  
**Weight:** 8.6g  
**Internal Volume:** 0.5 mL

**Material:** Titanium | Polysulphone | Silicone  
**Weight:** 4.6g  
**Internal Volume:** 0.25 mL


\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

\*\* With a catheter of 20 cm and Surecan® Safety II. For countries under CE mark only.

# Celsite® IMPLANTOFIX®

## Standard venous access ports with screw clamp connection

For repeated intra-venous administration of, for example, chemotherapy, antibiotics and anti-viral drugs, total parenteral nutrition (TPN), blood sampling or transfusion.

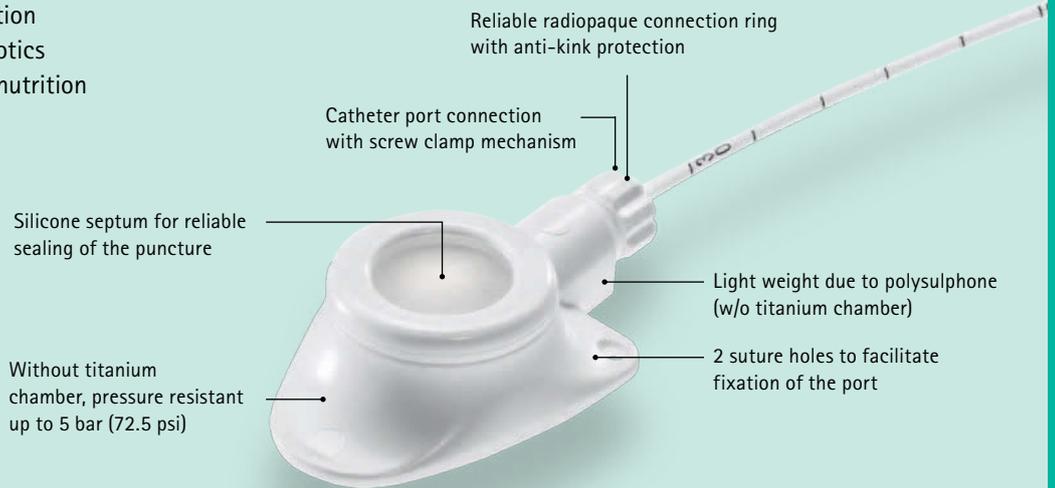


Venous Access

| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | Implantation technique | Type           | Reference | Accessories see page 30 |
|-----------------|-----------|---------|-------------|---------------------|-----|------------------------|----------------|-----------|-------------------------|
|                 |           |         |             | 19G                 | 22G |                        |                |           |                         |
| <b>Standard</b> |           |         |             |                     |     |                        |                |           |                         |
| PUR             | 5 / 1.7   | 1.1     | 700         | 22                  | 10  | Surgical cut-down      | IMPLANTOFIX®   | 4430263   | ⑥                       |
| PUR             | 5 / 1.7   | 1.1     | 370         | 22                  | 10  | Seldinger, OTW         | IMPLANTOFIX®   | 4438604   | ⑬                       |
| PUR             | 5 / 1.7   | 1.1     | 700         | 22                  | 10  | Braunule               | IMPLANTOFIX®   | 4438620   | ⑪                       |
| Silicone        | 6 / 2.0   | 1.2     | 600         | 23                  | 11  | Seldinger              | IMPLANTOFIX® S | 4438704   | ⑫                       |
| <b>Small</b>    |           |         |             |                     |     |                        |                |           |                         |
| PUR             | 5 / 1.7   | 1.1     | 370         | 22                  | 10  | Seldinger, OTW         | IMPLANTOFIX®   | 4438647   | ⑬                       |
| PUR             | 5 / 1.7   | 1.1     | 700         | 22                  | 10  | Surgical cut-down      | IMPLANTOFIX®   | 4433521   | ⑥                       |
| PUR             | 5 / 1.7   | 1.1     | 700         | 22                  | 10  | Braunule               | IMPLANTOFIX®   | 4438663   | ⑪                       |
| Silicone        | 6 / 2.0   | 1.2     | 600         | 23                  | 11  | Seldinger              | IMPLANTOFIX® S | 4438747   | ⑫                       |

### All IMPLANTOFIX® products contain:


- 2 x Screw connectors
- 2 x Straight Surecan® 22G x 30 mm
- 1 x Spanner
- 1 x Vein lifter

#### Standard

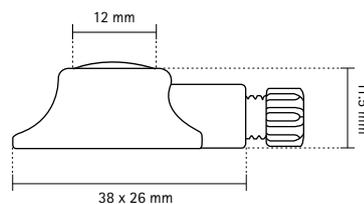

**Material:** Polysulphone  
**Weight:** 6 g  
**Internal Volume:** 0.33 mL

#### Small

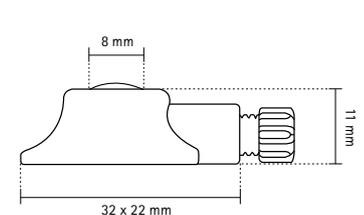


**Material:** Polysulphone  
**Weight:** 4.3 g  
**Internal Volume:** 0.15 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

# Access Ports for venous access

## Celsite® Double Port

Specialized venous access ports with two separated port chambers for simultaneous infusion

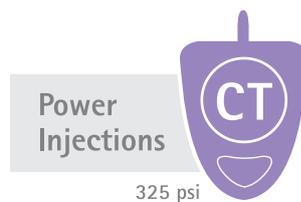


- For simultaneous infusion of e.g. incompatible drugs
- For infusion with high flow rates by using both lumina
- Administration of continuous infusion and bolus injection
- Alternating puncture sites
- Profiled shape to be easily placed in a small pocket
- Small size facilitates implantation in paediatric and underweight patients
- Off-set silicone catheter tip ensures that no mixing of drugs occurs at the catheter tip
- Available with radiopaque "CT" marking.



| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |    | 325 PSI Recommended maximum flow rates (mL/s) Contrast media at 37°C (325 psi = 22.4 bar) |     |     |                           |     |     | Implantation technique | Type   | Reference | Accessories see page 30 |     |
|-----------------|-----------|---------|-------------|---------------------|----|---|-----|-----|---------------------------|-----|-----|------------------------|--------|-----------|-------------------------|-----|
|                 |           |         |             |                     |    | Viscosity 5.8 mPa.s (cP)  |     |     | Viscosity 11.4 mPa.s (cP) |     |     |                        |        |           |                         |     |
|                 |           |         |             |                     |    | 19G   | 22G | 22G | 20G                       | 19G | 22G |                        |        |           |                         | 20G |
| <b>Standard</b> |           |         |             |                     |    |   |     |     |                           |     |     |                        |        |           |                         |     |
| Silicone        | 10 / 3.2  | 1.2 x 2 | 800         | 24                  | 10 | 2   | 5   | 8   | 1                         | 4   | 6   | Seldinger              | ST401L | 4430100   | ⑦                       |     |
| <b>Small</b>    |           |         |             |                     |    |   |     |     |                           |     |     |                        |        |           |                         |     |
| Silicone        | 10 / 3.2  | 1.2 x 2 | 800         | 24                  | 10 | 2   | 5   | 8   | 1                         | 4   | 6   | Seldinger              | ST405L | 4430101   | ⑦                       |     |




Standard

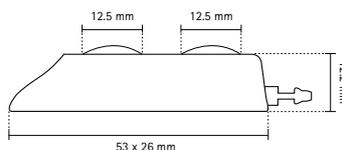

**Material:** Titanium | Epoxy  
**Weight:** 14g  
**Internal Volume:** 0.5 mL x 2

Small

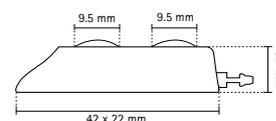

**Material:** Titanium | Epoxy  
**Weight:** 7.5g  
**Internal Volume:** 0.25 mL x 2

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

\*\* With a catheter of 20 cm and Surecan® Safety II. For countries under CE mark only.

# Celsite® Valved

Venous PSU access ports with valved catheter tip

- For chemotherapy, administration of antibiotics, parenteral nutrition and blood sampling
- Allows easy infusion and aspiration
- Anti-Reflux radiopaque silicone catheter
- Distal 3-way valve


Conditions:



Venous Access


| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | Implantation technique | Type   | Reference | Accessories see page 30 |
|-----------------|-----------|---------|-------------|---------------------|-----|------------------------|--------|-----------|-------------------------|
|                 |           |         |             | 19G                 | 22G |                        |        |           |                         |
| <b>Standard</b> |           |         |             |                     |     |                        |        |           |                         |
| Silicone        | 7.5 / 2.5 | 1.5     | 800         | 20                  | 9   | Seldinger              | ST301V | 4430092   | ⑦                       |
| <b>Small</b>    |           |         |             |                     |     |                        |        |           |                         |
| Silicone        | 7.5 / 2.5 | 1.5     | 800         | 20                  | 9   | Seldinger              | ST305V | 4430095   | ⑦                       |

### Standard

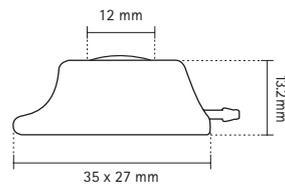

**Material:** Titanium | Polysulphone  
**Weight:** 9g  
**Internal Volume:** 0.5 mL

### Small

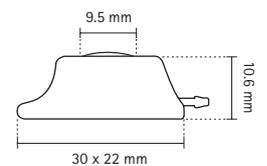

**Material:** Titanium | Polysulphone  
**Weight:** 4.7g  
**Internal Volume:** 0.25 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

# Access Ports for arterial access

## Celsite® Arterial

For loco-regional chemotherapy of liver tumours and hepatic artery infusion therapy (surgical implantation technique)

- For loco-regional chemotherapy of liver tumours and hepatic artery infusion therapies
- The access port is implanted at the base of the ribs, while the catheter is introduced into the *arteria gastroduodenalis* so that the catheter tip is located in the *arteria hepatica*
- The radiopaque silicone catheter has three rings to facilitate immobilisation of the catheter in the artery


### Accessories:

Every Access Port kit contains


- 2 Straight Surecan® needles 22G x 30 mm
- 1 vein lifter



| Catheter        | Access Port                       | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | Implantation technique | Type         | Reference |
|-----------------|-----------------------------------|-----------|---------|-------------|---------------------|-----|------------------------|--------------|-----------|
|                 |                                   |           |         |             | 19G                 | 22G |                        |              |           |
| <b>Standard</b> |                                   |           |         |             |                     |     |                        |              |           |
| Silicone        | Celsite® (Titanium/ Polysulphone) | 6.5 / 2.2 | 1.0     | 800         | 24                  | 10  | Surgical cut-down      | T302         | 4430042   |
| PUR             | IMPLANTOFIX® (Polysulphone)       | 5 / 1.7   | 1.1     | 700         | 22                  | 10  | Surgical cut-down      | IMPLANTOFIX® | 4438817** |

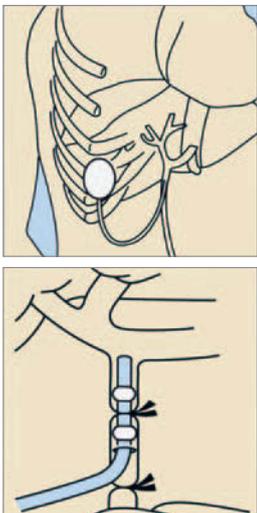


Celsite® Standard

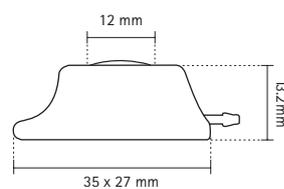

**Material:** Titanium | Polysulphone  
**Weight:** 9g  
**Internal Volume:** 0.5 mL

Celsite® IMPLANTOFIX® Standard

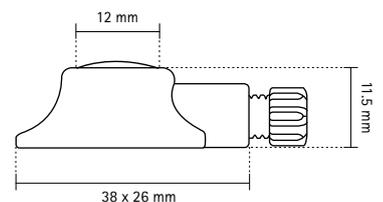

**Material:** Polysulphone  
**Weight:** 6g  
**Internal Volume:** 0.33 mL


\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

\*\* Polyurethane catheter with two rings.

# Celsite® Anthron® Arterial

For loco-regional chemotherapy of liver tumours via a heparin covered polyurethane catheter

- The Anthron® catheter is specially designed for percutaneous access via the femoral or axillary artery, to the hepatic artery, for hepatic arterial infusion of chemotherapy (HAIC).
- Anthron® is a hydrophilic polyurethane catheter to which heparin is ionically bound. It is particularly indicated to help prevent catheter occlusion and catheter-related thrombosis.

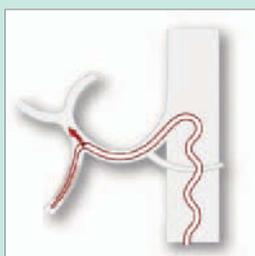

Arterial Access


### Accessories:

Every Access Port kit contains


- 1 tunneling rod
- 1 vein lifter
- 2 Straight Surecan® needles 22G x 30 mm
- 1 Winged Surecan 20G x 20 mm

| Catheter             | OD (F)                                    | OD (mm) | ID (mm) | Length (mm)              | Flow rate* (ml/min) |     | Implantation technique | Type      | Reference |
|----------------------|---|---------|---------|--------------------------|---------------------|-----|------------------------|-----------|-----------|
|                      |   |         |         |                          | 19G                 | 22G |                        |           |           |
| <b>Small</b>         |   |         |         |                          |                     |     |                        |           |           |
| Tapered PUR Anthron* | Non tapered portion 5F<br>Distal tip 2.7F | 1.7/0.9 | 1.1/0.5 | Total 900<br>Tapered 200 | 18                  | 10  | Percutaneous           | R305-A5ST | 4442465   |

Celsite® Small



Tapered catheter



**Material:** Titanium | Polysulphone  
**Weight:** 4.7 g  
**Internal Volume:** 0.25 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.


# Access Ports for peritoneal access

## Celsite® Peritoneal

For loco-regional chemotherapy of peritoneal metastases and ovarian cancer

Peritoneal Access

- For loco-regional chemotherapy of peritoneal metastases and ovarian cancer
- The access port is implanted at the base of the ribs and the catheter is placed at the required location inside the abdominal cavity
- The radiopaque silicone catheter with multiple perforations ensures optimal diffusion of infused drugs and reliable patency of the catheter

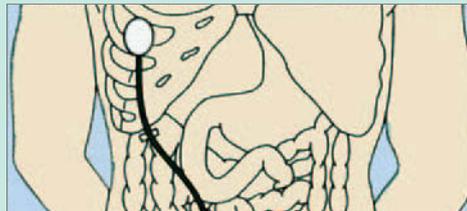

### Accessories:

Every Access Port kit contains


- 2 Straight Surecan® needles 22G x 30 mm
- 1 vein lifter

The implantation accessories kit AP16F can be ordered separately (Reference 4430493; see page 21).

| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | Implantation technique | Type  | Reference |
|-----------------|-----------|---------|-------------|---------------------|-----|------------------------|-------|-----------|
|                 |           |         |             | 19G                 | 22G |                        |       |           |
| <b>Standard</b> |           |         |             |                     |     |                        |       |           |
| Silicone        | 15 / 4.9  | 2.6     | 420         | 46                  | 12  | peritoneal             | T203J | 4430069   |



### Standard

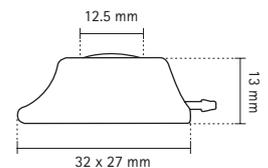

**Material:** Titanium | Epoxy  
**Weight:** 10g  
**Internal Volume:** 0.5 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

# Access Ports for pleural access

## Celsite® DRAINAPORT

For intra-peritoneal administration of chemotherapy, hydration, drainage of malignant ascites, or drainage of malignant pleural effusion

- For intra-peritoneal administration of chemotherapy, hydration, drainage of malignant ascites, or drainage of malignant pleural effusion
- Avoids repeated, painful puncture for drainage
- Improves quality of life and is an easy and effective solution for home care treatment
- Celsite® DRAINAPORT can be implanted percutaneously or by surgical cut-down technique
- **Catheter cuff** promotes tissue ingrowth to reduce infection risk and holds the catheter securely in place
- **Connection** is secured with the radiopaque titanium connection ring
- **Silicone septum** for reliable puncture and easy port location
- **Anatomic design** with delta shape profile, light weight and easy to suture
- Smooth, large and flexible **multiperforated silicone catheter** with 49 oval holes (Ø 1.1 x 1.6 mm) from the tip up to 20 cm to prevent blockage of the catheter and ensure optimal efficiency



Pleural Access

| Catheter        | OD (F/mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | Implantation technique | Type    | Reference |
|-----------------|-----------|---------|-------------|---------------------|-----|------------------------|---------|-----------|
|                 |           |         |             | 19G                 | 22G |                        |         |           |
| <b>Standard</b> |           |         |             |                     |     |                        |         |           |
| Silicone        | 15/4.9    | 2.6     | 550         | 46                  | 12  | peritoneal / pleural   | T203J-1 | 4430169   |



### Accessories:

Every Access Port kit contains

- 2 Straight Surecan® needles 22G x 33 mm

The implantation accessories kit AP16F can be ordered separately (Reference 4430493; see page 21).

### Standard

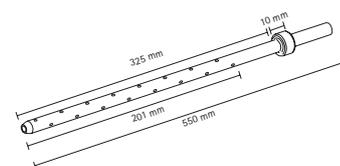

**Material:** Titanium | Epoxy  
**Weight:** 10g  
**Internal Volume:** 0.5 mL




\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

# Access Ports for spinal or epidural access

## Celsite® Spinal

For spinal administration of pain relieving drugs

- For spinal administration of pain relieving drugs
- The catheter is tunneled under the skin to the access port, which is implanted at the base of the ribs
- Light weight and comfortable
- Profiled shape design facilitates insertion
- Integrated 20 µm titanium filter prevents the passage of particles

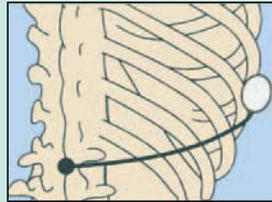

### Catheter

Every Access Port kit contains 2 catheters:


- 1 multiperforated closed tip polyamide catheter (PA)
- 1 open tip polyurethane catheter (PUR) with a teflon-coated guide wire

| Catheter        | OD  | OD (mm) | ID (mm) | Length (mm) | Flow rate* (ml/min) |     | Implantation technique | Type     | Reference |
|-----------------|-----|---------|---------|-------------|---------------------|-----|------------------------|----------|-----------|
|                 |     |         |         |             | 19G                 | 22G |                        |          |           |
| <b>Standard</b> |     |         |         |             |                     |     |                        |          |           |
| PUR and PA      | 19G | 1.05    | 0.6     | 1000        | 4                   | 3   | spinal/epidural        | ST304-19 | 4430096   |
| PUR and PA      | 20G | 0.86    | 0.45    | 1000        | 1                   | 1   | spinal/epidural        | ST304-20 | 4430097   |

### Accessory kit:

- Screw connector (2x)
- Spanner
- Anti-kink device (2x)
- Tunneling rod
- Winged Surecan® needle 20G x 20 mm
- Omnifix syringe 10 mL
- Perican Tuohy needle 16G (ST304-19) or Tuohy needle 18G (ST304-20)
- Sterifix 0.2 µm filter
- Scalpel size 10 and 11
- Sterican needle 20G x 70 mm
- Perifix LOR syringe
- Straight Surecan® 22G x 30 mm (2x)

### Standard

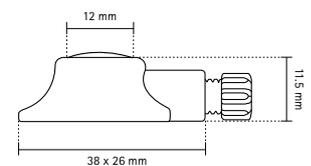

**Material:** Polysulphone | Titanium-Filter  
**Weight:** 6g  
**Internal Volume:** 0.33 mL

\* Gravity infusion of saline (0.9%) through a 22G respectively 19G needle from a height difference of 1 m and a catheter length of 40 cm.

# MR Compatibility and High Pressure Resistance

## Celsite®



Spinal or Epidural Access

### MR-Conditional

Non-clinical testing demonstrated that Celsite® Access Ports and Surecan®/Cytocan® port needles (including Safety II and Ultrasite®) are MR Conditional. A patient with these devices can be scanned immediately after placement under the following conditions:

- Static magnetic field of 3-Tesla and 1.5-Tesla
- Maximum spatial gradient magnetic field of 710 Gauss/cm or less
- Maximum whole body averaged specific absorption rate (SAR) of 2.9 W/kg for 15 minutes of scanning

MR image quality may be compromised if the area of interest is in the exact same area or relatively close to the position of the devices. Therefore, optimization of MR imaging parameters to compensate for the presence of these devices may be necessary.

Please see instructions for use for general information and information on MRI-related heating.

### Pressure Resistance

All venous Celsite® Access Ports with titanium chamber are pressure resistant up to 325 psi / 22.4 bar (except for valved catheters and Celsite® Implantofix®).



Please see instructions for use for detailed device information regarding high pressure injection.

### Material


All Celsite® Access Ports are latex-, PVC- and DEHP-free. All Surecan®/Cytocan® needles are latex- and DEHP-free.



# Safety Access Port Needles

## Surecan® Safety II

High pressure resistant non-coring safety needle for access ports

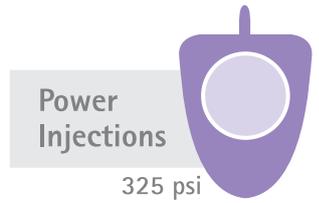

Surecan® Safety II is the power injectable access port needle with an easy to use safety mechanism for minimized risk of needlestick injuries.

The small size and unique design of Surecan® Safety II ensures comfort for both clinicians and patients, either in hospital or for home care treatment.



### User safety

Intuitive safety mechanism for minimized risk of needlestick injuries



### Patient comfort

Low profile and foam pad for better patient comfort





### Handling

Flexible and ergonomic wings for secure handling



### Power injections

Suitable for power injections up to 325 psi

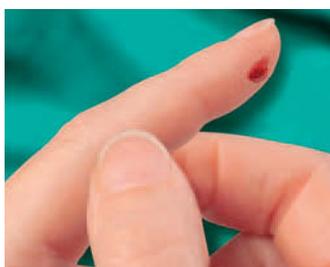

For more information on the risks and prevention of needlestick injuries:

[www.safeinfusiontherapy.com](http://www.safeinfusiontherapy.com)



### Surecan® Safety II non-coring safety needle

- tubing length cannula to connector:  
190 +/- 10 mm



| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| G 19 | 1.1                   | 15                  | 20              | 4447000   |
| G 19 | 1.1                   | 20                  | 20              | 4447001   |
| G 19 | 1.1                   | 25                  | 20              | 4447002   |
| G 19 | 1.1                   | 32                  | 20              | 4447003   |
| G 19 | 1.1                   | 38                  | 20              | 4447004   |
| G 20 | 0.9                   | 15                  | 20              | 4447005   |
| G 20 | 0.9                   | 20                  | 20              | 4447006   |
| G 20 | 0.9                   | 25                  | 20              | 4447007   |
| G 20 | 0.9                   | 32                  | 20              | 4447008   |
| G 20 | 0.9                   | 38                  | 20              | 4447009   |
| G 22 | 0.7                   | 15                  | 20              | 4447010   |
| G 22 | 0.7                   | 20                  | 20              | 4447011   |
| G 22 | 0.7                   | 25                  | 20              | 4447012   |
| G 22 | 0.7                   | 32                  | 20              | 4447013   |

### Surecan® Safety II non-coring safety needle with Ultrasite® and Y-site


- Y-site configuration
- tubing length Y-site to connector:  
82 +/- 10 mm
- tubing length cannula to Y-site: 90 +/- 10 mm
- Ultrasite is a needle-free, positive pressure valve which reduces the risk of blood reflux



| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| G 19 | 1.1                   | 15                  | 20              | 4447028   |
| G 19 | 1.1                   | 20                  | 20              | 4447029   |
| G 19 | 1.1                   | 25                  | 20              | 4447030   |
| G 19 | 1.1                   | 32                  | 20              | 4447031   |
| G 19 | 1.1                   | 38                  | 20              | 4447032   |
| G 20 | 0.9                   | 15                  | 20              | 4447033   |
| G 20 | 0.9                   | 20                  | 20              | 4447034   |
| G 20 | 0.9                   | 25                  | 20              | 4447035   |
| G 20 | 0.9                   | 32                  | 20              | 4447036   |
| G 22 | 0.7                   | 15                  | 20              | 4447038   |
| G 22 | 0.7                   | 20                  | 20              | 4447039   |
| G 22 | 0.7                   | 25                  | 20              | 4447040   |

### Easy removal

- 1 Stabilise the needle base on the port
  - 2 Firmly pull the wings up until you hear a "Click"
- Green dot and audible click clearly indicate the safety mechanism was executed
  - Non-absorbant closed-cell foam pad of the patient plate
  - MR conditional, Latex and DEHP free



# Access Port Needles

## Winged Surecan® | Cytocan®

### Winged Surecan® non-coring needle

- use for long-term infusions
- high pressure resistant up to 325 psi (22.4 bar)
- flexible wings for relieved puncture and fixation
- latex- and DEHP-free
- extension tubing with clamp
- tubing length cannula to connector: 200 +/- 10 mm



| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| 19G  | 1.1                   | 15                  | 15              | 4448286   |
| 19G  | 1.1                   | 20                  | 15              | 4448294   |
| 19G  | 1.1                   | 25                  | 15              | 4448308   |
| 20G  | 0.9                   | 15                  | 15              | 4448332   |
| 20G  | 0.9                   | 20                  | 15              | 4448340   |
| 20G  | 0.9                   | 25                  | 15              | 4448359   |
| 20G  | 0.9                   | 30                  | 15              | 4448367   |
| 22G  | 0.7                   | 12                  | 15              | 4448375   |
| 22G  | 0.7                   | 15                  | 15              | 4448383   |
| 22G  | 0.7                   | 20                  | 15              | 4448391   |
| 22G  | 0.7                   | 25                  | 15              | 4448405   |

### Winged Surecan® non-coring needle with Y-site

- use for long-term infusions
- flexible wings for relieved puncture and fixation
- latex- and DEHP-free (wings)
- extension tubing with clamp (PVC-free)
- tubing length cannula to connector: 200 +/- 10 mm
- Y-site configuration



| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| 19G  | 1.1                   | 20                  | 15              | 4448430   |
| 19G  | 1.1                   | 25                  | 15              | 4448448   |
| 20G  | 0.9                   | 15                  | 15              | 4448472   |
| 20G  | 0.9                   | 20                  | 15              | 4448480   |
| 20G  | 0.9                   | 25                  | 15              | 4448499   |
| 22G  | 0.7                   | 15                  | 15              | 4448529   |
| 22G  | 0.7                   | 20                  | 15              | 4448537   |
| 22G  | 0.7                   | 25                  | 15              | 4448545   |
| 22G  | 0.7                   | 30                  | 15              | 4448553   |

### Cytocan® non-coring needle with fixation base

- use for long-term infusions
- flexible, transparent fixation base for reliable deployment
- latex- and DEHP-free
- extension tubing with clamp
- tubing length cannula to connector: 250 +/- 10 mm



| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| 19G  | 1.1                   | 15                  | 25              | 4438035   |
| 19G  | 1.1                   | 20                  | 25              | 4438019   |
| 19G  | 1.1                   | 25                  | 25              | 4438027   |
| 20G  | 0.9                   | 15                  | 25              | 4439759   |
| 20G  | 0.9                   | 20                  | 25              | 4439767   |
| 20G  | 0.9                   | 25                  | 25              | 4439775   |
| 22G  | 0.7                   | 15                  | 25              | 4439694   |
| 22G  | 0.7                   | 20                  | 25              | 4439635   |
| 22G  | 0.7                   | 25                  | 25              | 4439686   |

# Access Port Needles

## Angled Surecan® | Straight Surecan®

### Angled Surecan® non-coring needle


- use for short-term infusions
- latex- and DEHP-free (hub)



| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| 19G  | 1.1                   | 15                  | 50              | 4438000   |
| 19G  | 1.1                   | 20                  | 50              | 4439430   |
| 19G  | 1.1                   | 25                  | 50              | 4439406   |
| 20G  | 0.9                   | 15                  | 50              | 4439929   |
| 20G  | 0.9                   | 20                  | 50              | 4439937   |
| 20G  | 0.9                   | 25                  | 50              | 4439945   |
| 20G  | 0.9                   | 35                  | 50              | 4434862   |
| 22G  | 0.7                   | 15                  | 50              | 4439813   |
| 22G  | 0.7                   | 20                  | 50              | 4439821   |
| 22G  | 0.7                   | 25                  | 50              | 4439830   |
| 22G  | 0.7                   | 35                  | 50              | 4434870   |

### Straight Surecan® non-coring needle

- use for bolus injection or flushing of the Access Port
- latex- and DEHP-free (hub)

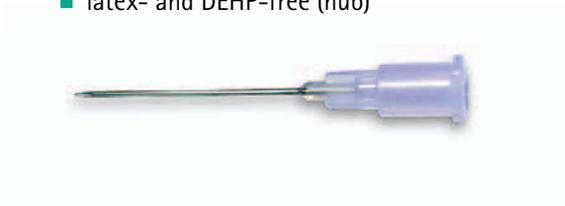

| Size | Cannula diameter (mm) | Cannula length (mm) | Sales unit-pcs. | Reference |
|------|-----------------------|---------------------|-----------------|-----------|
| 20G  | 0.9                   | 40                  | 100             | 4439953   |
| 20G  | 0.9                   | 70                  | 100             | 4439998   |
| 20G  | 0.9                   | 90                  | 100             | 4440000   |
| 22G  | 0.7                   | 30                  | 100             | 4439848   |
| 24 G | 0.55                  | 25                  | 100             | 4439414   |

# Peripherally inserted central catheters (PICC)

## Celsite® PICC-Cel


Peripherally Inserted Central venous polyurethane Catheter for short to long-term drug infusion therapy

Celsite® PICC-Cel is a Peripherally Inserted Central venous polyurethane (PUR) Catheter, indicated for short to long-term drug infusion therapy (up to 3 months) such as antibiotherapy, blood sampling and transfusion, Total Parenteral Nutrition (TPN), antivirals or chemotherapy.

- MR Safe (if using with Ultrasite® valve then the system is MR Conditional)
- Reverse taper design catheter from the hub for 10 cm reduces the risk of bleeding and increases resistance to kinking at skin exit
- Radiopaque

### Catheter characteristics

- Single and double lumen catheters available: Double lumen catheters allow simultaneous infusion of incompatible drugs
- PUR catheter marked every cm from 0 at the hub end helps monitoring of catheter progress and confirmation of complete catheter removal

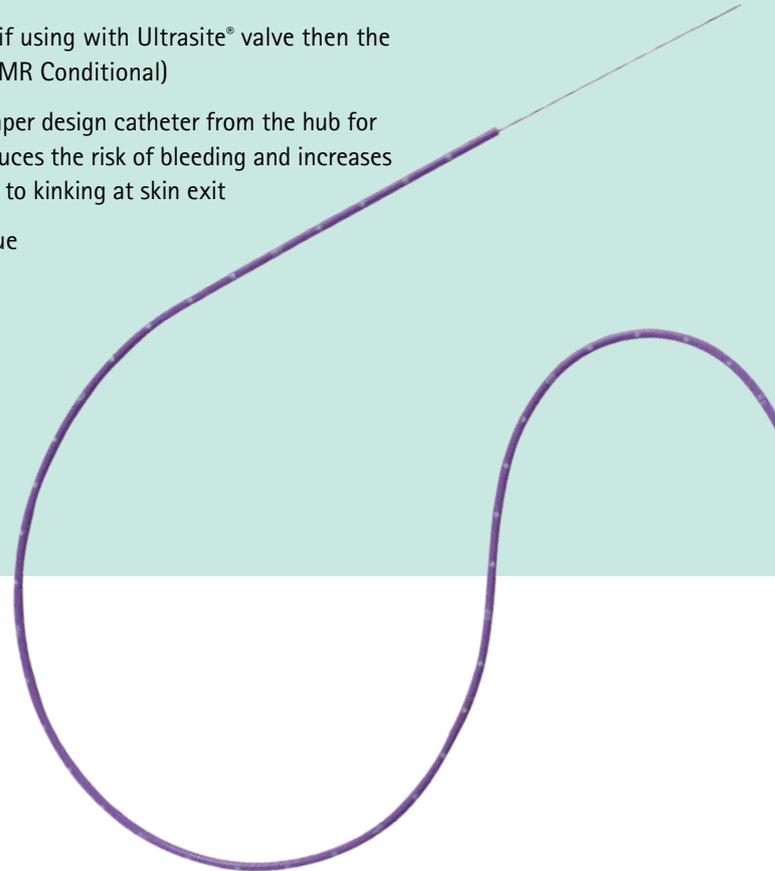

### PICC-Cel range

Box of 5 units

| N° lumen | Catheter/<br>peelable introducer | Catheter length | Maximum flow rate<br>(300 psi/20 bar) | Reference |
|----------|----------------------------------|-----------------|---------------------------------------|-----------|
| Single   | 4F                               | 51 cm           | 5 mL/sec                              | 04439001  |
| Single   | 5F                               | 61 cm           | 5 mL/sec                              | 04439002  |
| Double   | 5F                               | 56 cm           | 5 mL/sec                              | 04439003  |
| Double   | 6F                               | 61 cm           | 5 mL/sec                              | 04439004  |

### Implantation Accessories in the kit:



21G x 70 mm echogenic puncture needle for better visualisation under echo-guidance.



10 mL Omnifix® syringe



Scalpel (N° 11)



0.018" x 70 cm stainless steel guide-wire with 7cm floppy gold-plated tungsten tip, for introduction of the peelable introducer and to measure catheter length



Ultrasite® needle-free valve (1 for each line)



PICC-Cel Grip-Lok® Securement device




4F, 5F or 6F x 10 cm peelable introducer (color coded for easier identification)

Tape measure (66 cm/26") facilitates catheter measurement and trimming before implantation

Celsite® PICC-Cel is also indicated for:


- Central Venous Pressure (CVP) monitoring
- High Pressure (HP) injection of contrast media (5 mL/sec, 300 psi max, 20.68 bar).

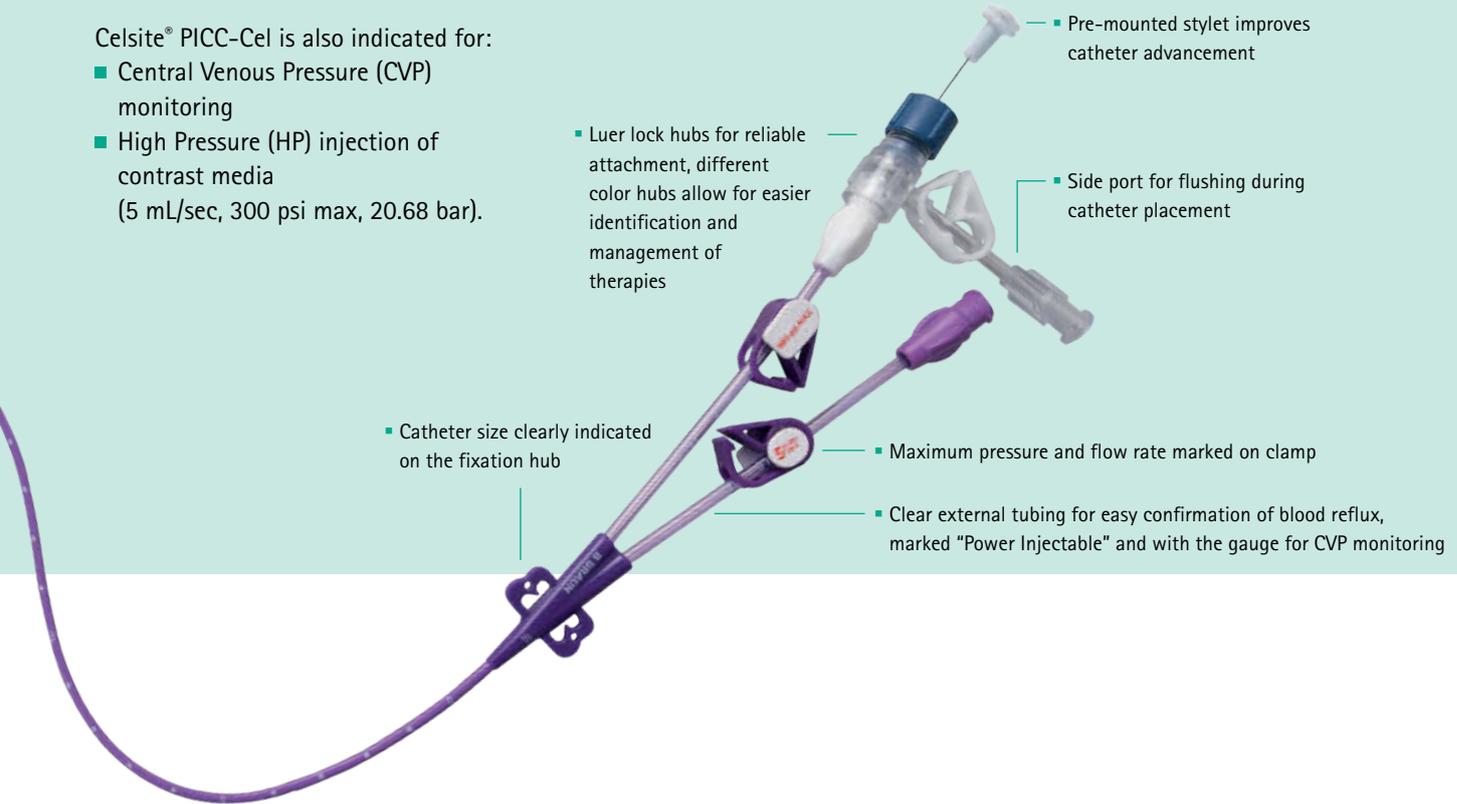

- Luer lock hubs for reliable attachment, different color hubs allow for easier identification and management of therapies
- Pre-mounted stylet improves catheter advancement
- Side port for flushing during catheter placement
- Catheter size clearly indicated on the fixation hub
- Maximum pressure and flow rate marked on clamp
- Clear external tubing for easy confirmation of blood reflux, marked "Power Injectable" and with the gauge for CVP monitoring

### PICC-Cel Grip-Lok® Securement device

Ref. 04439010 – Box of 50 units

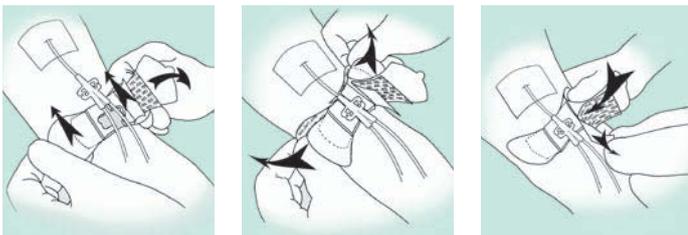

As suturing is not recommended\* due to infection risk, one PICC-Cel Grip-Lok® is available in each Celsite® PICC-Cel box for safe and clean fixation of the PICC-Cel catheter at the skin exit.


PICC-Cel Grip-Lok securement devices can be ordered separately in boxes of 50 units.



- The 2 holes on the hub are compatible with other securement devices



- Ultrasite® needle-free valve minimizes the risk of blood exposure and inadvertent air embolism

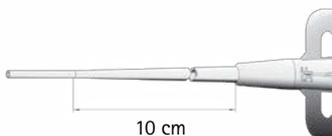

- 10 cm reverse taper catheter design reduces risk of bleeding



- Luer connector for flushing of the guide wire

\* Infusion Nursing Standards of Practice for catheter stabilization J. Infus. Nursing 2006;29(IS):S1-S92

# Recommended maximum flow rates (mL/s)

## Celsite® Access Port Systems

with Angled Surecan® needle and Winged Surecan® needle without Y-site



Recommended maximum flow rates

| Celsite® type                 |  | Contrast media at 37°    |      |      |                           |      |      |
|-------------------------------|--|--------------------------|------|------|---------------------------|------|------|
|                               |  | Viscosity 5.8 mPa.s (cP) |      |      | Viscosity 11.4 mPa.s (cP) |      |      |
|                               |  | Needle size              |      |      | Needle size               |      |      |
|                               |  | 22 G                     | 20 G | 19 G | 22 G                      | 20 G | 19 G |
| Celsite®<br>Baby/<br>Brachial | Babyport® – Babyport® PC                               | 2                        | 4    | -    | 1                         | 3    | -    |
|                               | Brachial   | 2                        | 4    | -    | 1                         | 3    | -    |
|                               | Brachial L – Brachial R                                | 2                        | 4    | -    | 1                         | 3    | -    |
|                               | Babyport® S  | 2                        | 4    | -    | 2                         | 4    | -    |
| Double Port                   | ST405L   | 2                        | 5    | 6    | 2                         | 4    | 6    |
| Celsite®<br>Small             | STL205P – STR205P                                      | 2                        | 4    | 6    | 2                         | 3    | 5    |
|                               | ST205P – ST305P  | 2                        | 4    | 6    | 2                         | 3    | 4    |
|                               | ST305C   | 2                        | 4    | 5    | 1                         | 3    | 4    |
|                               | T/ST305 – T/ST205 – ST505 – ST315 – ST215 – ST205F ECG | 2                        | 4    | 5    | 2                         | 3    | 4    |
|                               | STL205F – STR205F                                      | 2                        | 4    | 5    | 2                         | 3    | 4    |
|                               | ST305L – ST505L – ST205ECG – ST315L – ST205L           | 2                        | 4    | 5    | 2                         | 3    | 5    |
|                               | ST205H – ST305H – ST505H                               | 2                        | 5    | 7    | 2                         | 4    | 6    |
| Double Port                   | ST401L   | 2                        | 5    | 7    | 2                         | 4    | 6    |
| Celsite®<br>Standard          | ST301C – ST501C – ST201C – ST3010TW                    | 2                        | 5    | 6    | 2                         | 4    | 5    |
|                               | T/ST301F – ST201F ECG – T/ST201F – T/ST501F – ST311F   | 2                        | 5    | 6    | 2                         | 4    | 6    |
|                               | T/ST301P – ST201P                                      | 2                        | 5    | 6    | 2                         | 4    | 6    |
|                               | T/ST301 – ST311 – T/ST201 – T/ST501 – ST201ECG         | 2                        | 5    | 6    | 2                         | 4    | 6    |
|                               | STL201L – STR201L                                      | 2                        | 5    | 6    | 2                         | 4    | 6    |
|                               | ST201H – T/ST301H – ST311H – ST501H                    | 2                        | 5    | 7    | 2                         | 5    | 7    |
|                               | STL201H – STR201H                                      | 2                        | 5    | 7    | 2                         | 5    | 7    |
|                               | ST301G – ST201G – ST501G                               | 2                        | 5    | 8    | 2                         | 5    | 7    |

Recommended maximum pressure (CT function) – 325 psi (22.4 bar)

Flow rates may vary depending on temperature of contrast media and length of the implanted catheter.

For flow rates of Surecan® Safety II, please refer to concerned Access Port product pages.

# Portfolio overview and type declaration

## Celsite® Access Port Systems

| Indication                    | Catheter                      | OD             | Catheter material   | Access Port type   | Dead volume port | Dead volume catheter (mL/cm) |
|-------------------------------|-------------------------------|----------------|---|--|------------------|------------------------------|
| VENOUS                        | Small catheters               | 5 F            | Polyurethane  | ST201C   | 0.50 mL          | 0.010 mL                     |
|                               |                               |                |   | ST301C, ST3010TW, ST501C   |                  |                              |
|                               |                               |                |   | ST305C   |                  |                              |
|                               |                               |                |   | 4430263, 4438604, 4438620 (Implantofix®)<br>4438647, 4438663, 4433521 (Implantofix®) |                  |                              |
|                               |                               | 6.5 F          | Polyurethane  | ST201P, T301P, ST301P  | 0.50 mL          | 0.015 mL                     |
|                               |                               |                |   | ST305P, STL205P, STR205P   | 0.25 mL          |                              |
|                               |                               | 6 F            | Silicone  | 4438704 (Implantofix®)   | 0.33 mL          | 0.011 mL                     |
|                               |                               |                |   | 4438747 (Implantofix®)   | 0.15 mL          |                              |
|                               |                               | 6.5 F          | Silicone  | T201F, ST201F, T301F, ST301F, ST311F*, T501F, ST501F, ST201F ECG                     | 0.50 mL          | 0.008 mL                     |
|                               |                               |                |   | T205, ST205, ST215*, T305, ST305, ST315*, ST505                                      | 0.25 mL          |                              |
| Large and high flow catheters | 8.5 F                         | Silicone       | T201, ST201, T301, ST301, ST311*, T501, ST501, STL201L, STR201L | 0.50 mL  | 0.010 mL         |                              |
|                               |                               |                | ST305L, ST505L  | 0.25 mL  |                  |                              |
|                               | 8.5 F                         | Polyurethane   | ST201H, T301H, ST301H, ST311H*, STL201H, STR201H                | 0.50 mL  | 0.020 mL         |                              |
|                               |                               |                | ST305H, ST505H  | 0.25 mL  |                  |                              |
| 10 F                          | Silicone                      | ST201G, ST301G | 0.50 mL   | 0.020 mL   |                  |                              |
| SPECIALITY VENOUS             | Small catheters               | 4.5 F          | Polyurethane  | Babyport®  | 0.15 mL          | 0.005 mL                     |
|                               |                               | 5 F            | Polyurethane  | Brachial   | 0.15 mL          | 0.010 mL                     |
|                               |                               | 6 F            | Silicone  | Babyport® S  | 0.15 mL          | 0.011 mL                     |
|                               |                               | 6.5 F          | Silicone  | STR205F, STL205F, ST205F ECG   | 0.25 mL          | 0.008 mL                     |
|                               | Large and high flow catheters | 8.5 F          | Silicone  | STR201L, STL201L, ST201 ECG  | 0.50 mL          | 0.010 mL                     |
|                               |                               |                |   | ST205ECG   | 0.25 mL          |                              |
|                               | Valved catheters              | 7.5 F          | Silicone  | ST301V   | 0.50 mL          | 0.018 mL                     |
|                               |                               |                |   | ST305V   | 0.25 mL          |                              |
|                               | Double port catheters         | 10 F           | Silicone  | ST401L   | 0.50 mL x 2      | 0.013 mL                     |
|                               |                               |                |   | ST405L   | 0.25 mL x 2      |                              |
| OTHER SPECIALITIES            | Small arterial catheters      | 5 F            | Polyurethane  | 4438817  | 0.33 mL          | 0.010 mL                     |
|                               |                               | 6.5 F          | Silicone  | T302   | 0.50 mL          | 0.008 mL                     |
|                               | Peritoneal catheters          | 15 F           | Silicone  | T203J, T203J-1   | 0.50 mL          | 0.053 mL                     |
|                               | Spinal/epidural catheters     | 19 G           | Polyamide and polyurethane                                      | ST304-19   | 0.33 mL          | 0.003 mL                     |
| 20 G                          |                               | ST304-20       |   | 0.002 mL   |                  |                              |

\* Pre-connected Access Port Systems

S

**Accessories**  
S=Set

T

**Reservoir**  
T=Titanium

R

**Discreet**  
R=Right  
L=Left

2

**Body**  
2=Epoxy  
2 suture holes  
3=Polysulphone  
3 suture holes  
4=Double Port Epoxy  
5=Polysulphone  
with Silicone ears

0

**Connection**  
0=with connection ring  
1=pre-connected

1

**Indication**  
1=Venous (std)  
2=Arterial  
3=Peritoneal & pleural  
4=Spinal  
5=Venous (small)


F

**Catheter**  
L=Silicone (large)  
F=Silicone (small)  
G=Silicone (high flow)  
P=PUR  
J=Silicone peritoneal/pleural  
H=PUR (high flow)  
C=PUR Tecothane  
V=Valve  
OTW=Over the wire  
ECG =ECG implantation technique

# Accessories

## Venous accessories

| Pieces | Kit designation               | Implantation technique |                | Percutaneous   |                    |                |              |  |
|--------|-------------------------------|------------------------|----------------|----------------|--------------------|----------------|--------------|--|
|        |                               | Seldinger              | OTW            | Seldinger/OTW  | Seldinger/Braunule | Braunule       |              |  |
|        |                               | Kit ①                  | Kit ⑫          | Kit ③          | Kit ⑬              | Kit ②          | Kit ⑪        |  |
| 2      | A Straight Surecan® needles   | 22 G x 30 mm           | 22 G x 30 mm   | 22 G x 30 mm   | 22 G x 30 mm       | 22 G x 30 mm   | 22 G x 30 mm |  |
| 1      | B Vein lifter                 | x                      | x              | x              | x                  | x              | x            |  |
| 1      | C Puncture needle             | 18 G x 70 mm           | 18 G x 70 mm   | 18 G x 70 mm   | 18 G x 70 mm       | 18 G x 70 mm   |              |  |
| 1      | Splittocan needle             |                        |                |                |                    | 14 G x 80 mm   | 14 G x 80 mm |  |
| 1      | E J guide wire with dispenser | 0.035" x 50 cm         | 0.035" x 50 cm | 0.035" x 70 cm | 0.035" x 70 cm     | 0.035" x 50 cm |              |  |
| 1      | F Dilator                     |                        |                | 6F x 100 mm    | 6F x 100 mm        |                |              |  |
| 1      | G Tear-away introducer        | L 180/140 mm           | L 180/140 mm   |                |                    | L 180/140 mm   |              |  |
| 1      | H Tunnelling rod              | x                      | x              | x              | x                  | x              | x            |  |
| 1      | I Omnifix luer syringe        | 10 mL                  | 10 mL          | 10 mL          | 10 mL              | 10 mL          | 10 mL        |  |
| 1      | J Winged Surecan® needle      | 20 G x 20 mm           |                | 20 G x 20 mm   |                    | 20 G x 20 mm   |              |  |

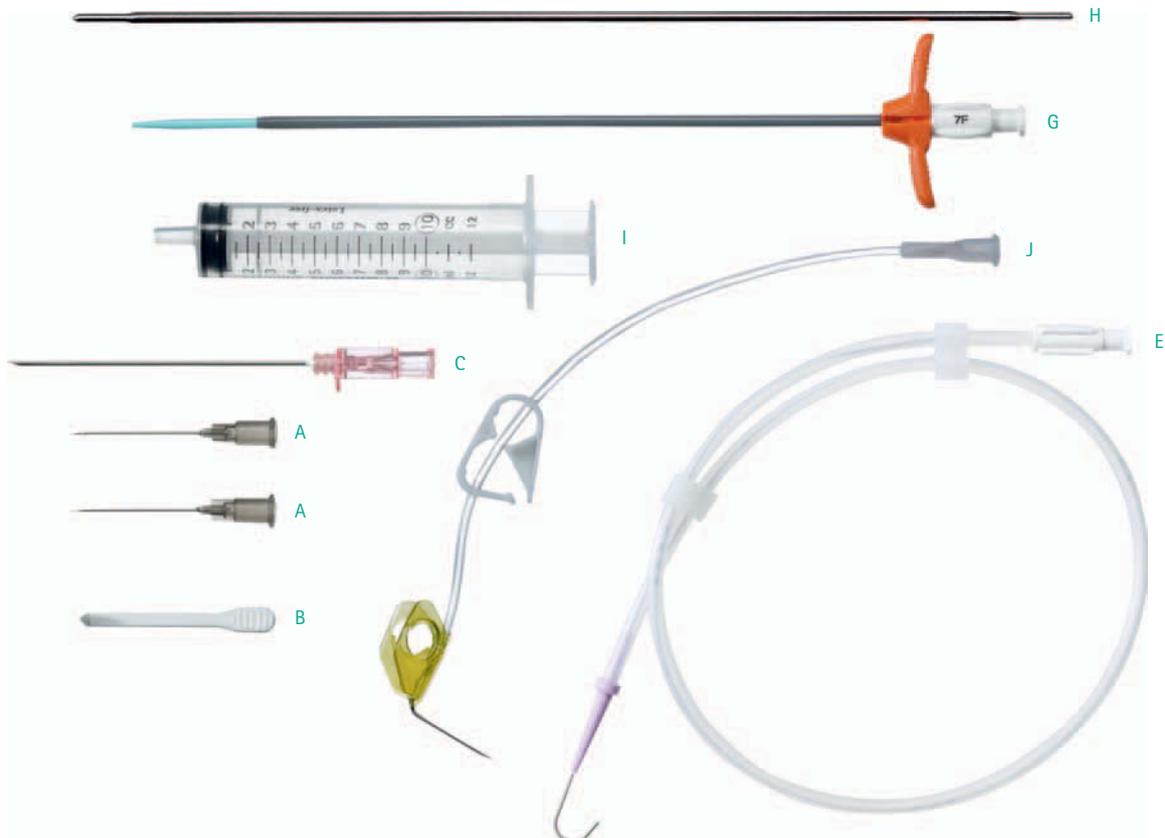


# Accessories

## Venous accessories

| Pieces | Implantation technique           | Surgical Cut-down |                | Percutaneous                      |                |                |                |                |
|--------|----------------------------------|-------------------|----------------|-----------------------------------|----------------|----------------|----------------|----------------|
|        |                                  | Kit ⑥             | Kit ⑭          | Seldinger/OTW<br>Kit ⑩ (Brachial) | Kit ④ (Baby)   | Kit ⑤ (Baby)   | Kit ⑦          | ECG<br>Kit ⑨   |
| 2      | Straight Surecan® needles        | 22 G x 30 mm      | 22 G x 30 mm   | 22 G x 30 mm                      | 22 G x 30 mm   | 22 G x 30 mm   | 22 G x 30 mm   | 22 G x 30 mm   |
| 1      | Vein lifter                      | x                 | x              | x                                 | x              | x              | x              | x              |
| 1      | Puncture needle                  |                   |                | 18 G x 70 mm                      | 20 G x 50 mm   | 18 G x 70 mm   | 18 G x 70 mm   | 18 G x 70 mm   |
| 1      | Introcan needle                  |                   |                |                                   | 20 G x 32 mm   |                |                |                |
| 1      | J guide wire with dispenser      |                   | 0.035" x 70 cm | 0.035" x 150 cm                   | 0.025" x 50 cm | 0.035" x 50 cm | 0.035" x 50 cm | 0.035" x 70 cm |
| 1      | ECG cable                        |                   | x              |                                   |                |                |                | x              |
| 1      | Tear-away introducer/<br>Dilator |                   |                | L 180/140 mm                      | L 80/50 mm     | L 180/140 mm   | 180/140 mm     | 180/140 mm     |
| 1      | Tunnelling rod                   |                   |                | x                                 | x              | x              | x              | x              |
| 1      | Omnifix luer syringe             |                   | 10 mL          | 10 mL                             | 10 mL          | 10 mL          | 10 mL          | 10 mL          |
| 1      | Winged Surecan® needle           |                   |                | 22 G x 15 mm                      | 22 G x 15 mm   | 22 G x 15 mm   | 20 G x 20 mm   | 20 G x 20 mm   |

## Separate accessory kits

| Pieces | Reference                          | 4430483                   | 4430484                   | 4430492                   | 4430493                     |
|--------|------------------------------------|---------------------------|---------------------------|---------------------------|-----------------------------|
|        | Kit designation                    | AP 6F                     | AP 7F                     | AP 9F                     | AP 16F                      |
| 1      | C Puncture needle                  | 20 G x 50 mm<br>Seldinger | 18 G x 70 mm<br>Seldinger | 18 G x 70 mm<br>Seldinger | 18 G x 70 mm<br>Seldinger   |
| 1      | Introcan needle                    | 20 G x 32 mm              |                           |                           |                             |
| 1      | E J guide wire with dispenser      | 0.025" x 50 cm            | 0.035" x 50 cm            | 0.035" x 50 cm            | 0.035" x 40 cm              |
| 1      | G Tear-away introducer/<br>Dilator | 6F, short<br>(80/50 mm)   | 7F x180/140 mm            | 9F x180/140 mm            | 16F with dilator<br>12F-14F |
| 1      | H Tunnelling rod                   | x                         | x                         | x                         | x                           |
| 1      | B Vein lifter                      | x                         | x                         | x                         |                             |
| 1      | I Omnifix luer syringe             | 10 mL                     | 10 mL                     | 10 mL                     | 10 mL                       |
| 1      | J Winged Surecan® needle           | 22 G x 15 mm              | 20 G x 20 mm              | 20 G x 20 mm              | 19 G x 25 mm                |



B. Braun Melsungen AG | Vascular Systems | Sieversufer 8 | 12359 Berlin | Germany  
Phone +49 30 568207300 | Fax +49 30 568207210 | [www.bbraun.com](http://www.bbraun.com)

Aesculap AG | Am Aesculap-Platz | 78532 Tuttlingen | Germany  
Phone +49 7461 95-0 | Fax +49 7461 95-26 00 | [www.aesculap.com](http://www.aesculap.com)

Aesculap – a B. Braun company

Subject to technical changes. All rights reserved.  
This brochure may only be used for the exclusive  
purpose of obtaining information about our  
products. Reproduction in any form partial or  
otherwise is not permitted.

Brochure No. 6050179

0314/2.0/9